

Glow

WOOD STOVE SERIES



hergöm

Glow

WOOD STOVE SERIES



Discover the Elegance and Efficiency of Glow.

Introducing Glow, the wood stove that will transform your home into a cozy and elegant haven. Made with the highest quality cast iron, Glow not only offers controlled, clean, and efficient combustion but also stands out for its modern and sleek design, as well as its impressive versatility.

Transform your home with the elegance and efficiency of Glow. Discover how a stove can be much more than a source of heat: a true object of design and comfort.



The Glow advantages

- **Controlled and Efficient Combustion:** Enjoy even and long-lasting heat with an advanced combustion system that maximizes efficiency and minimizes emissions.
- **Modern and Sleek Design:** Its contemporary aesthetic integrates perfectly into any home, adding a touch of sophistication.
- **Fire view:** A large front glass and side panels provide a panoramic view of the fire, creating a magical and relaxing atmosphere in any space.
- **Versatile Installation:** The Glow series adapts to all your needs with various bases and configurations.



Features

- **Manufactured in cast iron:** Ensures durability and excellent thermal performance.
- **Double combustion:** Increases energy efficiency and reduces pollutant emissions.
- **External air connection for combustion:** Improves indoor air quality and combustion efficiency.
- **Removable ash drawer:** Facilitates stove cleaning and maintenance.
- **Top and rear smoke outlet:** Offers installation flexibility according to the space requirements.
- **Airwash glass cleaning system:** Keeps the glass clean for a clearer view of the fire.



Log holder



Legs



Pedestal



Wall mount / Custom base

Glow

WOOD STOVE SERIES





Technical Specifications

Certification	CEE-0046/24-1
Norm	EN 13240
Energy efficiency index (Ecolabel)	A
Nominal heat output	5,9 kW
Minimum-maximum heat output	4-8 kW
Efficiency	80%
CO 13% O ₂	1250 mg/Nm ³
Flue exit	Top / Rear
Flue exit Ø	150 mm.
External air inlet Ø	80 mm.
Maximum log length	350 mm. (hor.) / 400 mm. (vert.)

Performance and emissions data are obtained based on nominal heat output



Dimensions

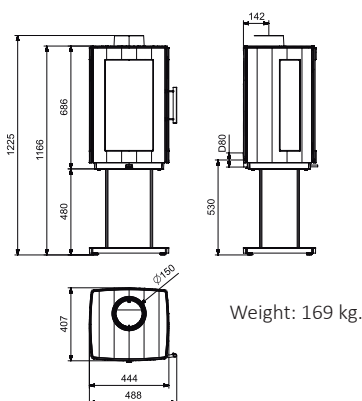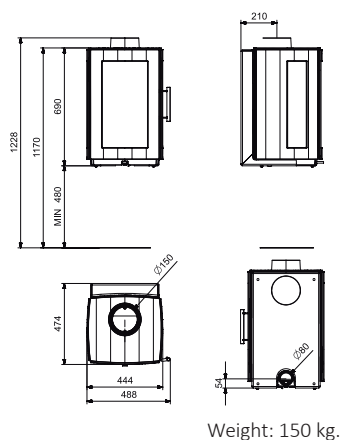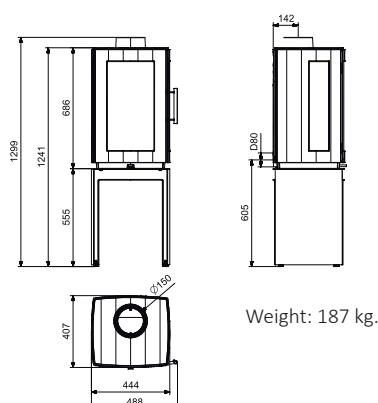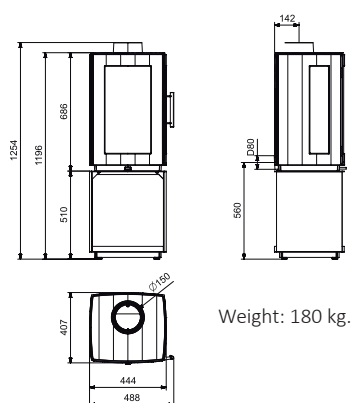

hergom

Industrias Hergóm, S.L.

C/Borracho S/N Soto de la Marina, Cantabria (SPAIN)
+34 942 587 000

H E R G O M . C O M

Industrias Hergóm, S.L. reserves the right to make changes to its product range without prior notice.
Product availability varies by country.
Warranty and insurance conditions for products may vary by country. ©Hergóm 2024